

## MIR PART NUMBER: 1927720


### General Information:

<b>Product Description:</b>	M 225/3 0/R32 BLACK MOR COS CONV BELT
<b>Features:</b>	Oil Resistant
<b>Market Segment:</b>	Recycling Applications
<b>Applications:</b>	-

### Belt Construction:



<b>Top Side (Material):</b>	NBR blend
<b>Top Side (Surface):</b>	Smooth
<b>Top Side (Thickness):</b>	- in - mm
<b>Top Side (Color):</b>	Black
<b>Top Side Shore:</b>	60A Shore

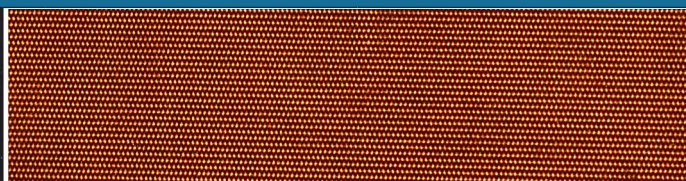

<b>Bottom Side (Material):</b>	-
<b>Bottom Side (Surface):</b>	Bare
<b>Bottom Side (Thickness):</b>	- in - mm
<b>Bottom Side (Color):</b>	-
<b>Bottom Side Shore:</b>	-

<b>Number of plies:</b>	3
<b>Weft:</b>	-

### Technical Belt Data:

<b>Foodgrade (FG):</b>	No	
<b>Flame Retardant (FR):</b>	No	
<b>Belt Weight:</b>	1.98 lbs/ft²	9.67 kg/m²
<b>Belt Thickness:</b>	0.31 in	7.94 mm
<b>Material Between Plies:</b>	-	
<b>Pulley Diameter (minimum):</b>	- in	- mm

<b>Tensile Rating:</b>	- lbs/in	
<b>Working Temperature Range:</b>	-25 to 250 °F	-32 to 121 °C
<b>Hardness Topside:</b>	60A Shore	
<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	225 (at 2% elongation) lbs/in	39.38 (at 2% elongation) N/mm
<b>Back Flexing:</b>	- in	- mm
<b>Anti-Static:</b>	No	

### Joining Method:

### Additional Information:

Belting Solved

24/7

On-Site Service 877 MIR-BELT



mir-belting.com  
mir@mir-belting.com