



## MIR PART NUMBER: 1987571



### General Information:

<b>Product Description:</b>	<b>E 120/3 U0/EL38 GREEN AS COS CONV BELT</b>
<b>Features:</b>	Antistatic, Thermoplastic, Abrasion Resistant, High Grip
<b>Market Segment:</b>	Paper & Print
<b>Applications:</b>	Slider Bed, Rollers, Flat

### Belt Construction:



Top Side (Material):	Elastoflex, RP		
Top Side (Surface):	P38 Very Fine Fabric Profile		
Top Side (Thickness):	0.04 in	1 mm	
Top Side (Color):	Light Green		
Top Side Shore:	55A Shore		

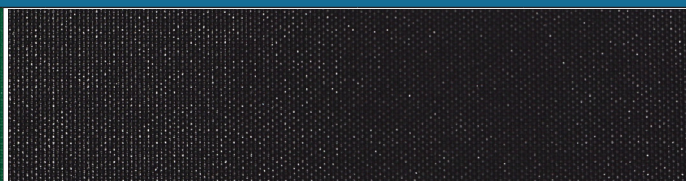

Bottom Side (Material):	Ropanol, TPU	
Bottom Side (Surface):	Impregnated Fabric	
Bottom Side (Thickness):	- in	- mm
Bottom Side (Color):	Black	
Bottom Side Shore:	-	

<b>Number of plies:</b>	3
<b>Weft:</b>	Rigid

### Technical Belt Data:

<b>Foodgrade (FG):</b>	No	
<b>Flame Retardant (FR):</b>	No	
<b>Belt Weight:</b>	0.76 lbs/ft²	3.7 kg/m²
<b>Belt Thickness:</b>	0.12 in	3.1 mm
<b>Material Between Plies:</b>	-	
<b>Pulley Diameter (minimum):</b>	1.97 in	50 mm

<b>Tensile Rating:</b>	- lbs/in	
<b>Working Temperature Range:</b>	5 to 176 °F	-15 to 80 °C
<b>Hardness Topside:</b>	55A Shore	
<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	68.4 lbs/in	11.97 N/mm
<b>Back Flexing:</b>	3.94 in	100 mm
<b>Anti-Static:</b>	Yes	

### Joining Method:

Hot splicing - FOF

### Additional Information:

Mechanical Fasteners

Belting Solved

24/7

On-Site Service 877 MIR-BELT



mir-belting.com  
mir@mir-belting.com