

## MIR PART NUMBER: 1999388



### General Information:

<b>Product Description:</b>	E 150/3 0/P30 GREEN COS CONV BELT
<b>Features:</b>	Foodgrade
<b>Market Segment:</b>	Logistics
<b>Applications:</b>	Slider Bed, Rollers, Flat

### Belt Construction:



Top Side (Material):	PVC (Flexam)	
Top Side (Surface):	Smooth, Glossy	
Top Side (Thickness):	0.14 in	3.6 mm
Top Side (Color):	Petrol	
Top Side Shore:	35A Shore	

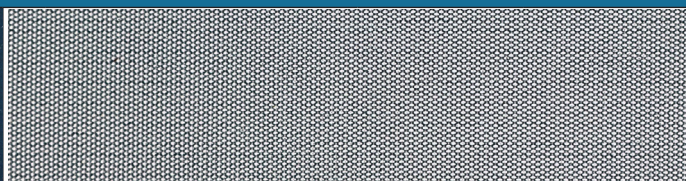

Bottom Side (Material):	Polyester	
Bottom Side (Surface):	Bare	
Bottom Side (Thickness):	- in	- mm
Bottom Side (Color):	Natural	
Bottom Side Shore:	-	

<b>Number of plies:</b>	3
<b>Weft:</b>	Rigid

### Technical Belt Data:

<b>Foodgrade (FG):</b>	Yes	
<b>Flame Retardant (FR):</b>	No	
<b>Belt Weight:</b>	1.5 lbs/ft <sup>2</sup>	7.3 kg/m <sup>2</sup>
<b>Belt Thickness:</b>	0.26 in	6.6 mm
<b>Material Between Plies:</b>	-	
<b>Pulley Diameter (minimum):</b>	3.15 in	80 mm

<b>Tensile Rating:</b>	- lbs/in	
<b>Working Temperature Range:</b>	5 to 176 °F	-15 to 80 °C
<b>Hardness Topside:</b>	35A Shore	
<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	85.65 lbs/in	15 N/mm
<b>Back Flexing:</b>	3.94 in	100 mm
<b>Anti-Static:</b>	No	

### Joining Method:

Hot splicing - FOF

### Additional Information:

Mechanical Fasteners

Belting Solved

24/7

On-Site Service 877 MIR-BELT



mir-belting.com  
mir@mir-belting.com