

## MIR PART NUMBER: 2003016



### General Information:

<b>Product Description:</b>	<b>E 120/3 0/U0 BLACK COS CONV BELT</b>
<b>Features:</b>	Antistatic, Low Noise
<b>Market Segment:</b>	Logistics: Distribution & Warehousing
<b>Applications:</b>	Slider Bed, Rollers, Flat

### Belt Construction:



<b>Top Side (Material):</b>	Ropanol, PUR	
<b>Top Side (Surface):</b>	Impregnated Fabric	
<b>Top Side (Thickness):</b>	0 in	0 mm
<b>Top Side (Color):</b>	Black	
<b>Top Side Shore:</b>	-	

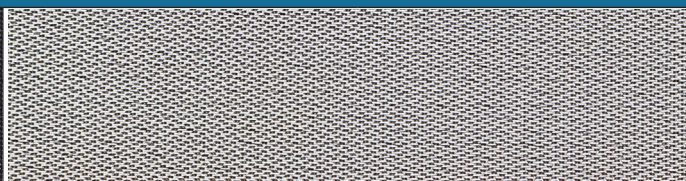

<b>Bottom Side (Material):</b>	Polyester	
<b>Bottom Side (Surface):</b>	Bare	
<b>Bottom Side (Thickness):</b>	- in	- mm
<b>Bottom Side (Color):</b>	Natural	
<b>Bottom Side Shore:</b>	-	

<b>Number of plies:</b>	3	
<b>Weft:</b>	Rigid	

### Technical Belt Data:

<b>Foodgrade (FG):</b>	No	
<b>Flame Retardant (FR):</b>	Yes	
<b>Belt Weight:</b>	0.61 lbs/ft <sup>2</sup>	3 kg/m <sup>2</sup>
<b>Belt Thickness:</b>	0.1 in	2.6 mm
<b>Material Between Plies:</b>	-	
<b>Pulley Diameter (minimum):</b>	2.36 in	60 mm

<b>Tensile Rating:</b>	- lbs/in	
<b>Working Temperature Range:</b>	5 to 176 °F	-15 to 80 °C
<b>Hardness Topside:</b>	-	
<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	68.52 lbs/in	12 N/mm
<b>Back Flexing:</b>	3.15 in	80 mm
<b>Anti-Static:</b>	Yes	

### Joining Method:

Business service splice

### Additional Information:

Belting Solved

24/7

On-Site Service 877 MIR-BELT



mir-belting.com  
mir@mir-belting.com