




## MIR PART NUMBER: 2025000


### General Information:

<b>Product Description:</b>	<b>E 80/2 0/E3 IVORY MATTE AS COSCONV BELT</b>
<b>Features:</b>	Antistatic, Foodgrade
<b>Market Segment:</b>	Food, Tobacco, Chemicals, Rubber & Plastics
<b>Applications:</b>	Slider Bed, Rollers, Flat


### Belt Construction:

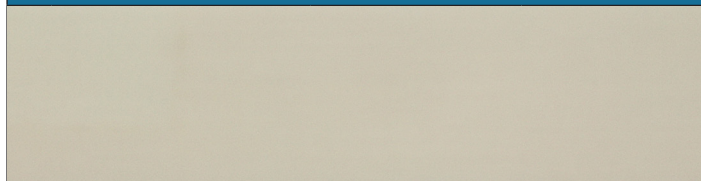

<b>Top Side (Material):</b>	Amtel, TPE-E	
<b>Top Side (Surface):</b>	Smooth, M2 Matte Finish	
<b>Top Side (Thickness):</b>	0.01 in	0.3 mm
<b>Top Side (Color):</b>	Ivory	
<b>Top Side Shore:</b>	40D Shore	

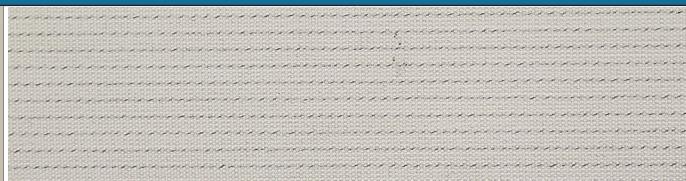

<b>Bottom Side (Material):</b>	Polyester	
<b>Bottom Side (Surface):</b>	Bare	
<b>Bottom Side (Thickness):</b>	- in	- mm
<b>Bottom Side (Color):</b>	Natural	
<b>Bottom Side Shore:</b>	-	



<b>Number of plies:</b>	2
<b>Weft:</b>	Rigid

### Technical Belt Data:

<b>Foodgrade (FG):</b>	Yes	
<b>Flame Retardant (FR):</b>	No	
<b>Belt Weight:</b>	0.47 lbs/ft <sup>2</sup>	2.3 kg/m <sup>2</sup>
<b>Belt Thickness:</b>	0.08 in	2.1 mm
<b>Material Between Plies:</b>	-	
<b>Pulley Diameter (minimum):</b>	1.57 in	40 mm

<b>Tensile Rating:</b>	- lbs/in	
<b>Working Temperature Range:</b>	-4 to 230 °F	-20 to 110 °C
<b>Hardness Topside:</b>	40D Shore	
<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	45.68 lbs/in	8 N/mm
<b>Back Flexing:</b>	2.36 in	60 mm
<b>Anti-Static:</b>	Yes	

### Joining Method:

Splice Finger 2 ply - 80 x 10

### Additional Information:

Mechanical Fasteners

Belting Solved

24/7

On-Site Service 877 MIR-BELT



mir-belting.com  
mir@mir-belting.com