




MIR PART NUMBER: 2027208

General Information:

Product Description:	M 150/3 N0/0 AMBER FXB CONV BELT
Features:	-
Market Segment:	-
Applications:	-

Belt Construction:

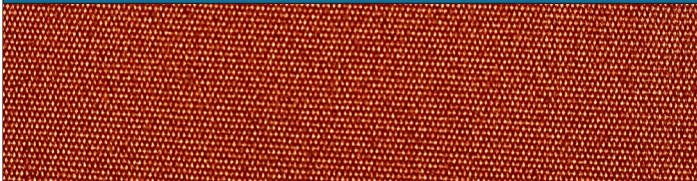

Top Side (Material):	NBR	
Top Side (Surface):	Bare	
Top Side (Thickness):	- in	- mm
Top Side (Color):	Amber	
Top Side Shore:	-	



Bottom Side (Material):	-	
Bottom Side (Surface):	Friction	
Bottom Side (Thickness):	- in	- mm
Bottom Side (Color):	-	
Bottom Side Shore:	-	

Number of plies:	3
Weft:	-

Technical Belt Data:

Foodgrade (FG):	No	
Flame Retardant (FR):	No	
Belt Weight:	0.58 lbs/ft²	2.83 kg/m²
Belt Thickness:	0.1 +/- .01 in	2.62 +/- .25 mm
Material Between Plies:	-	
Pulley Diameter (minimum):	2 in	50.8 mm

Tensile Rating:	- lbs/in	
Working Temperature Range:	-0.4 to 250 °F	-18 to 121 °C
Hardness Topside:	-	
Force at 1% Elongation (static) / k1% Relaxed:	150 (at 2% elongation) lbs/in	26.25 (at 2% elongation) N/mm
Back Flexing:	2 in	50.8 mm
Anti-Static:	No	

Joining Method:

Additional Information:

