




MIR PART NUMBER: 2051878



General Information:

Product Description:	SW125 00+01 black
Features:	Impact Resistant, Low Friction Back Side
Market Segment:	Logistics
Applications:	Slider Bed, Rollers, Flat

Belt Construction:

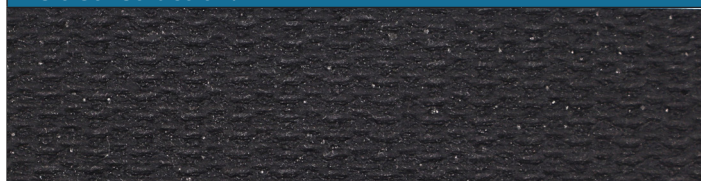

Top Side (Material):	PVC (Flexam)	
Top Side (Surface):	Impregnated Fabric	
Top Side (Thickness):	0.004 in	0.1 mm
Top Side (Color):	Black	
Top Side Shore:	-	

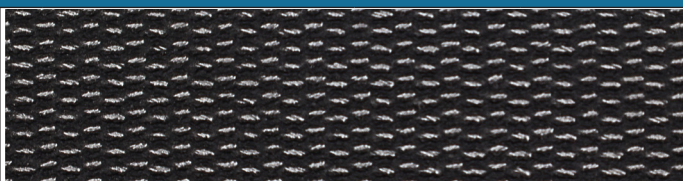

Bottom Side (Material):	PVC (Flexam)	
Bottom Side (Surface):	Brushed	
Bottom Side (Thickness):	- in	- mm
Bottom Side (Color):	Black	
Bottom Side Shore:	-	

Number of plies:	1
Weft:	Flexible

Technical Belt Data:

Foodgrade (FG):	No	
Flame Retardant (FR):	Yes	
Belt Weight:	0.74 lbs/ft²	3.6 kg/m²
Belt Thickness:	0.15 in	3.8 mm
Material Between Plies:	-	
Pulley Diameter (minimum):	2.76 in	70.1 mm

Tensile Rating:	- lbs/in	
Working Temperature Range:	5 to 180 °F	-15 to 82 °C
Hardness Topside:	-	
Force at 1% Elongation (static) / k1% Relaxed:	119.91 lbs/in	21 (Static) / 8 (Relaxed) N/mm
Back Flexing:	2.76 in	70 mm
Anti-Static:	No	

Joining Method:

Mechanical Fasteners

Additional Information:

Splice Finger 110X10

Belting Solved

24/7

On-Site Service 877 MIR-BELT



mir-belting.com
mir@mir-belting.com