


MIR PART NUMBER: 2097711



General Information:

Product Description:	R 40/3 0/R0 BLACK/TAN CONV BEL
Features:	-
Market Segment:	-
Applications:	-

Belt Construction:

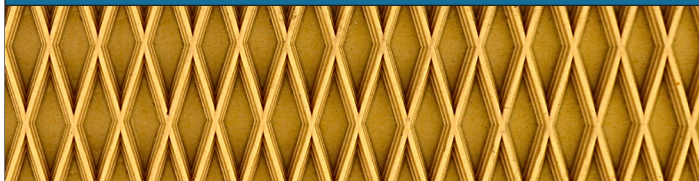

Top Side (Material):	SBR
Top Side (Surface):	Diamond
Top Side (Thickness):	- in - mm
Top Side (Color):	Tan
Top Side Shore:	-

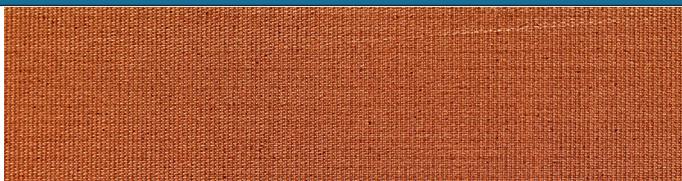

Bottom Side (Material):	RFL poly
Bottom Side (Surface):	Bare
Bottom Side (Thickness):	- in - mm
Bottom Side (Color):	Black
Bottom Side Shore:	-

Number of plies:	3
Weft:	-

Technical Belt Data:

Foodgrade (FG):	No
Flame Retardant (FR):	No
Belt Weight:	1.55 lbs/ft ² 7.56 kg/m ²
Belt Thickness:	0.36 +/- .03 in 9.14 +/- .76 mm
Material Between Plies:	-
Pulley Diameter (minimum):	3 in 76.2 mm

Tensile Rating:	- lbs/in
Working Temperature Range:	-40 to 250 °F -40 to 121 °C
Hardness Topside:	-
Force at 1% Elongation (static) / k1% Relaxed:	225 (at 2% elongation) lbs/in 40.3 (at 2% elongation) N/mm
Back Flexing:	3 in 76.2 mm
Anti-Static:	No

Joining Method:

Additional Information:

Belting Solved

24/7

On-Site Service 877 MIR-BELT



mir-belting.com
mir@mir-belting.com