


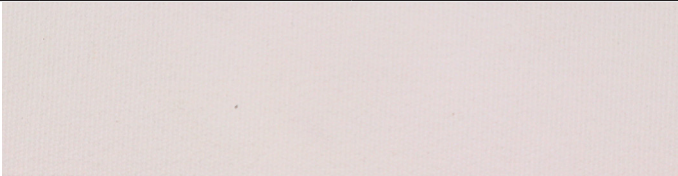



## MIR PART NUMBER: 67553

### General Information:

<b>Product Description:</b>	M 40/1 U0/U4 WHITE COS ROPANOL IMPREGNATED BOTTOM CONV BELT
<b>Features:</b>	Foodgrade
<b>Market Segment:</b>	Food
<b>Applications:</b>	Flat, Rollers, Troughed, Slider Bed

### Belt Construction:

					
<b>Top Side (Material):</b>		Ropanyl, TPU			
<b>Top Side (Surface):</b>		Smooth, Glossy			
<b>Top Side (Thickness):</b>		0.02 in	0.4 mm		
<b>Top Side (Color):</b>		White			
<b>Top Side Shore:</b>		87A Shore			
					
<b>Bottom Side (Material):</b>		Ropanol, PUR			
<b>Bottom Side (Surface):</b>		Impregnated Fabric			
<b>Bottom Side (Thickness):</b>		- in	- mm		
<b>Bottom Side (Color):</b>		Transparent			
<b>Bottom Side Shore:</b>		-			
<b>Number of plies:</b>		1			
<b>Weft:</b>		Flexible			

### Technical Belt Data:

<b>Foodgrade (FG):</b>	Yes			<b>Tensile Rating:</b>	- lbs/in	
<b>Flame Retardant (FR):</b>	No			<b>Working Temperature Range:</b>	-4 to 176 °F	-20 to 80 °C
<b>Belt Weight:</b>	0.18 lbs/ft <sup>2</sup>	0.88 kg/m <sup>2</sup>		<b>Hardness Topside:</b>	87A Shore	
<b>Belt Thickness:</b>	0.03 in	0.8 mm		<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	17.13 lbs/in	3 N/mm
<b>Material Between Plies:</b>	-			<b>Back Flexing:</b>	0.5 in	12.7 mm
<b>Pulley Diameter (minimum):</b>	0.25 in	6.3 mm		<b>Anti-Static:</b>	No	

### Joining Method:

Finger Splice

### Additional Information:

