



## MIR PART NUMBER: 84898


### General Information:

<b>Product Description:</b>	E 70/2 UO/U5 CLEAR AS MATTE FINISH CONV BELT
<b>Features:</b>	Abrasion Resistant, Cut Resistant
<b>Market Segment:</b>	-
<b>Applications:</b>	-

### Belt Construction:



Top Side (Material):	PU	
Top Side (Surface):	Matte	
Top Side (Thickness):	0.02 in	0.5 mm
Top Side (Color):	Transparent	
Top Side Shore:	92A Shore	

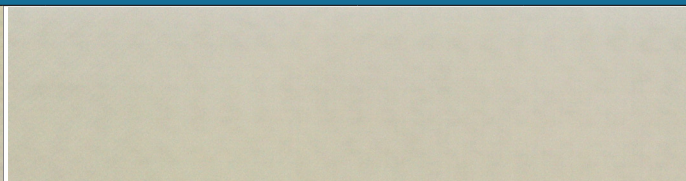

Bottom Side (Material):	Polyester	
Bottom Side (Surface):	Pu Impregnated	
Bottom Side (Thickness):	- in	- mm
Bottom Side (Color):	Transparent	
Bottom Side Shore:	-	

<b>Number of plies:</b>	2
<b>Weft:</b>	-

### Technical Belt Data:

<b>Foodgrade (FG):</b>	Yes	
<b>Flame Retardant (FR):</b>	No	
<b>Belt Weight:</b>	0.41 lbs/ft²	2 kg/m²
<b>Belt Thickness:</b>	0.07 in	1.85 mm
<b>Material Between Plies:</b>	-	
<b>Pulley Diameter (minimum):</b>	1.18 in	30 mm

<b>Tensile Rating:</b>	- lbs/in	
<b>Working Temperature Range:</b>	-4 to 212 °F	-20 to 100 °C
<b>Hardness Topside:</b>	92A Shore	
<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	34.2 lbs/in	6 N/mm
<b>Back Flexing:</b>	2.36 in	60 mm
<b>Anti-Static:</b>	Yes	

### Joining Method:

Single Finger

### Additional Information:

Belting Solved

24/7

On-Site Service 877 MIR-BELT



mir-belting.com  
mir@mir-belting.com