


MIR PART NUMBER: 10026

General Information:

Product Description:	E 3/2 U0/U0 AS TRANSPARENT CONV BELT 90009
Features:	Antistatic, Foodgrade
Market Segment:	Food Confectionary & Candy, Food Bakery, Logistics Container & Packaging, Paper & Print
Applications:	Flat, Rollers, Slider Bed

Belt Construction:

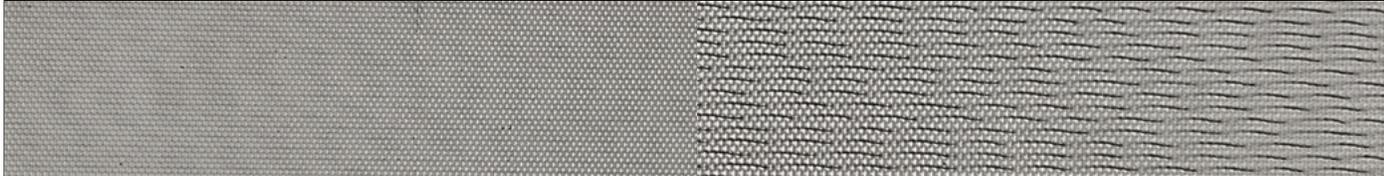

Top Side (Material):	Ropanol, PUR	
Top Side (Surface):	Impregnated Fabric	
Top Side (Thickness):	0 in	0 mm
Top Side (Color):	Transparent	
Top Side Shore:	-	

Bottom Side (Material):	Ropanol	
Bottom Side (Surface):	Impregnated Fabric	
Bottom Side (Thickness):	- in	- mm
Bottom Side (Color):	Transparent	
Bottom Side Shore:	-	



Number of plies:	2
Weft:	Rigid

Technical Belt Data:

Foodgrade (FG):	Yes	
Flame Retardant (FR):	No	
Belt Weight:	0.27 lbs/ft ²	1.3 kg/m ²
Belt Thickness:	0.05 in	1.2 mm
Tension Layer:	-	
Pulley Diameter (minimum):	0.24 in	6 mm

Tensile Rating:	- lbs/in	
Working Temperature Range:	-4 to 194 °F	-20 to 90 °C
Hardness Topside:	-	
Force at 1% Elongation (static) / k1% Relaxed:	34.2 lbs/in	6 N/mm
Back Flexing:	0.59 in	15 mm
Anti-Static:	Yes	

Joining Method:

Finger Over Finger, Finger Splice

Additional Information:

Glueing can only be done when the belt is exposed to normal temperature and the humidity is not excessive.

