




## MIR PART NUMBER: 1065

### General Information:

<b>Product Description:</b>	M 105/3 N0/N3 WHITE COS CONV BELT
<b>Features:</b>	-
<b>Market Segment:</b>	-
<b>Applications:</b>	-

### Belt Construction:

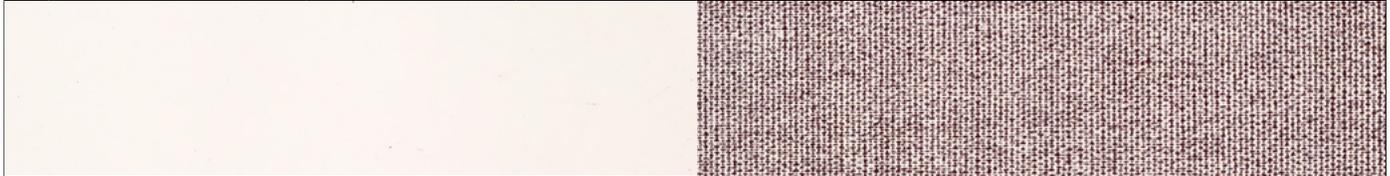

<b>Top Side (Material):</b>	NBR	
<b>Top Side (Surface):</b>	Smooth	
<b>Top Side (Thickness):</b>	0.05 in	1.2 mm
<b>Top Side (Color):</b>	White	
<b>Top Side Shore:</b>	-	

<b>Bottom Side (Material):</b>	RFL poly	
<b>Bottom Side (Surface):</b>	Friction	
<b>Bottom Side (Thickness):</b>	- in	- mm
<b>Bottom Side (Color):</b>	-	
<b>Bottom Side Shore:</b>	-	



<b>Number of plies:</b>	3
<b>Weft:</b>	-

### Technical Belt Data:

<b>Foodgrade (FG):</b>	Yes	
<b>Flame Retardant (FR):</b>	No	
<b>Belt Weight:</b>	0.75 lbs/ft <sup>2</sup>	3.66 kg/m <sup>2</sup>
<b>Belt Thickness:</b>	0.12 +/-0.01 in	3.15 +/-0.25 mm
<b>Tension Layer:</b>	-	
<b>Pulley Diameter (minimum):</b>	2.5 in	63.5 mm

<b>Tensile Rating:</b>	1050 lbs/in	
<b>Working Temperature Range:</b>	0 to 250 °F	-18 to 121 °C
<b>Hardness Topside:</b>	-	
<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	105 lbs/in	18.8 N/mm
<b>Back Flexing:</b>	- in	- mm
<b>Anti-Static:</b>	No	

### Joining Method:

Stepped Angle

### Additional Information:

