




MIR PART NUMBER: 11387

General Information:

| | |
|-----------------------------|--|
| Product Description: | M 100/2 U0/U2 WHITE COS CONV BELT |
| Features: | Foodgrade |
| Market Segment: | Food Meat & Poultry, Food Confectionary & Candy, Food Bakery |
| Applications: | Flat, Rollers, Slider Bed, Troughed |

Belt Construction:

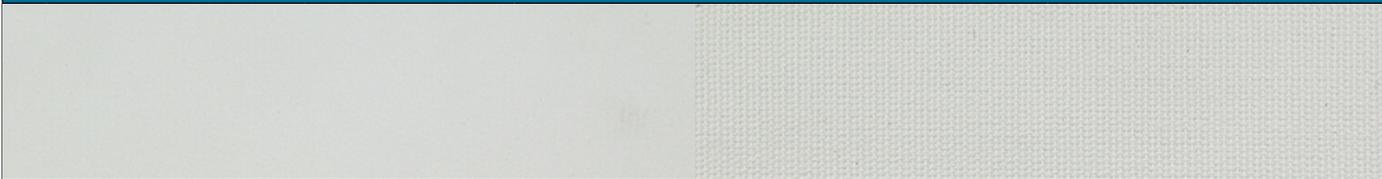

| | | |
|------------------------------|--------------|---------|
| Top Side (Material): | Ropanyl, TPU | |
| Top Side (Surface): | Matte | |
| Top Side (Thickness): | 0.01 in | 0.25 mm |
| Top Side (Color): | White | |
| Top Side Shore: | 85A Shore | |

| | | |
|---------------------------------|----------------|------|
| Bottom Side (Material): | Ropanol, PUR | |
| Bottom Side (Surface): | PU Impregnated | |
| Bottom Side (Thickness): | - in | - mm |
| Bottom Side (Color): | Transparent | |
| Bottom Side Shore: | - | |



| | |
|-------------------------|----------|
| Number of plies: | 2 |
| Weft: | Flexible |

Technical Belt Data:

| | | |
|-----------------------------------|--------------------------|-----------------------|
| Foodgrade (FG): | Yes | |
| Flame Retardant (FR): | No | |
| Belt Weight: | 0.37 lbs/ft ² | 1.8 kg/m ² |
| Belt Thickness: | 0.06 in | 1.5 mm |
| Tension Layer: | Polyester | |
| Pulley Diameter (minimum): | 0.47 in | 12 mm |

| | | |
|---|--------------|--------------|
| Tensile Rating: | - lbs/in | |
| Working Temperature Range: | -4 to 194 °F | -20 to 90 °C |
| Hardness Topside: | 85A Shore | |
| Force at 1% Elongation (static) / k1% Relaxed: | 57.1 lbs/in | 10 N/mm |
| Back Flexing: | 1.57 in | 40 mm |
| Anti-Static: | No | |

Joining Method:

Finger Over Finger, Finger Splice

Additional Information:

Clipper Lace UCM36 SP, Staple Lace RS62

