


MIR PART NUMBER: 11423

General Information:


Product Description:	E 80/2 U0/P5 GREEN GLOSS COS CONV
Features:	Antistatic, Foodgrade
Market Segment:	General Industry, Food, Agriculture
Applications:	Flat, Rollers, Slider Bed

Belt Construction:

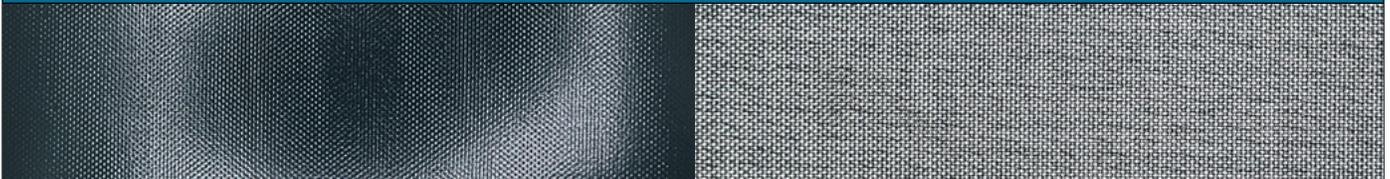

Top Side (Material):	Flexam, PVC	
Top Side (Surface):	Smooth, Glossy	
Top Side (Thickness):	0.02 in	0.4 mm
Top Side (Color):	Dark Green	
Top Side Shore:	80A Shore	

Bottom Side (Material):	Polyester	
Bottom Side (Surface):	Bare	
Bottom Side (Thickness):	- in	- mm
Bottom Side (Color):	Gray	
Bottom Side Shore:	-	



Number of plies:	2
Weft:	Rigid

Technical Belt Data:

Foodgrade (FG):	Yes	
Flame Retardant (FR):	No	
Belt Weight:	0.43 lbs/ft ²	2.1 kg/m ²
Belt Thickness:	0.08 in	2 mm
Tension Layer:	Polyester	
Pulley Diameter (minimum):	0.98 in	25 mm

Tensile Rating:	- lbs/in	
Working Temperature Range:	14 to 176 °F	-10 to 80 °C
Hardness Topside:	80A Shore	
Force at 1% Elongation (static) / k1% Relaxed:	45.68 lbs/in	8 N/mm
Back Flexing:	1.97 in	50 mm
Anti-Static:	Yes	

Joining Method:

Finger Over Finger, Finger Splice

Additional Information:

Glueing can only be done when the belt is exposed to normal temperature and the humidity is not excessive.

