


MIR PART NUMBER: 1914952

General Information:

Product Description:	E 150/3 0/P79 GRAY DIAMOND TOP COS CONV BELT
Features:	High Grip
Market Segment:	Wood, Corrugated Box
Applications:	Flat, Rollers, Slider Bed

Belt Construction:

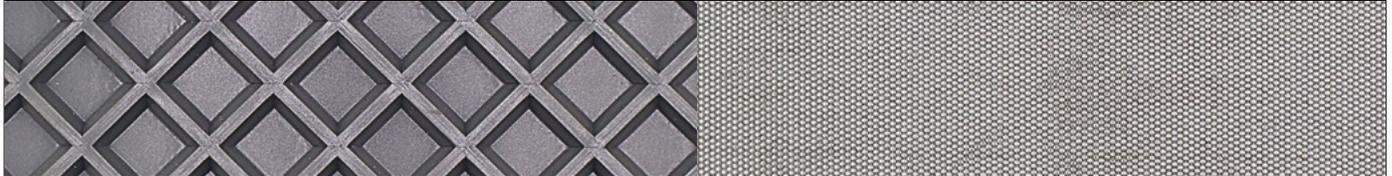

Top Side (Material):	Flexam, PVC	
Top Side (Surface):	Large Diamond Profile	
Top Side (Thickness):	0.19 in	4.8 mm
Top Side (Color):	Gray	
Top Side Shore:	55A Shore	

Bottom Side (Material):	Polyester	
Bottom Side (Surface):	Bare	
Bottom Side (Thickness):	- in	- mm
Bottom Side (Color):	Natural	
Bottom Side Shore:	-	



Number of plies:	3	
Weft:	Rigid	

Technical Belt Data:

Foodgrade (FG):	No	
Flame Retardant (FR):	No	
Belt Weight:	1.25 lbs/ft ²	6.1 kg/m ²
Belt Thickness:	0.31 in	7.8 mm
Tension Layer:	Polyester	
Pulley Diameter (minimum):	4.72 in	120 mm

Tensile Rating:	- lbs/in	
Working Temperature Range:	5 to 176 °F	-15 to 80 °C
Hardness Topside:	55A Shore	
Force at 1% Elongation (static) / k1% Relaxed:	85.65 lbs/in	15 N/mm
Back Flexing:	8.66 in	220 mm
Anti-Static:	No	

Joining Method:

Mechanical Fasteners

Additional Information:

Finger Splice 80X10

