




## MIR PART NUMBER: 1965304

### General Information:

<b>Product Description:</b>	M 120/I 0/P1 WHITE OFR COS
<b>Features:</b>	Foodgrade, Moderate Oil Resistant
<b>Market Segment:</b>	Dry Food Conveying, Abrasive Products
<b>Applications:</b>	Slider Bed, Flat Rollers, Troughed Rollers, Metal Detector Suitable, Accumulated Conveying, Troughed Conveying

### Belt Construction:

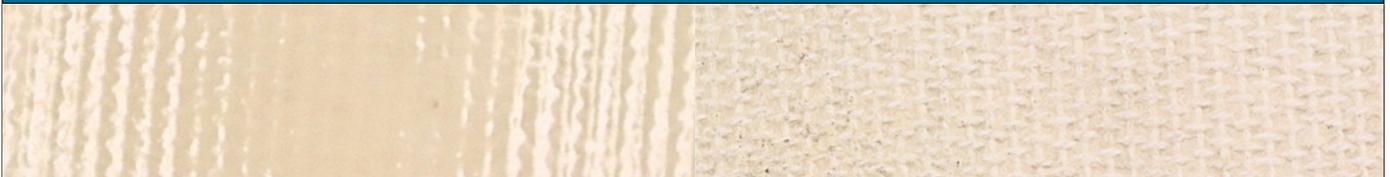

<b>Top Side (Material):</b>	PVC		<b>Bottom Side (Material):</b>	Spun Polyester	
<b>Top Side (Surface):</b>	Glossy		<b>Bottom Side (Surface):</b>	Medium Impregnated	
<b>Top Side (Thickness):</b>	- in	- mm	<b>Bottom Side (Thickness):</b>	- in	- mm
<b>Top Side (Color):</b>	White		<b>Bottom Side (Color):</b>	White	
<b>Top Side Shore:</b>	79A Shore		<b>Bottom Side Shore:</b>	-	



<b>Number of plies:</b>	1
<b>Weft:</b>	Flexible

### Technical Belt Data:

<b>Foodgrade (FG):</b>	Yes		<b>Tensile Rating:</b>	- lbs/in	
<b>Flame Retardant (FR):</b>	No		<b>Working Temperature Range:</b>	0 to 180 °F	-18 to 82 °C
<b>Belt Weight:</b>	0.72 lbs/ft <sup>2</sup>	3.5 kg/m <sup>2</sup>	<b>Hardness Topside:</b>	79A Shore	
<b>Belt Thickness:</b>	0.13 in	3.2 mm	<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	120 (at 2% elongation) lbs/in	21 (at 2% elongation) N/mm
<b>Tension Layer:</b>	-		<b>Back Flexing:</b>	- in	- mm
<b>Pulley Diameter (minimum):</b>	2 in	50.8 mm	<b>Anti-Static:</b>	No	

### Joining Method:

### Additional Information:

