




## MIR PART NUMBER: 1965311

### General Information:


<b>Product Description:</b>	M 120/I 0/P15 BLACK CHEVRON TOP COS CONV BELT
<b>Features:</b>	Chemical Resistant Status of Good
<b>Market Segment:</b>	Agriculture
<b>Applications:</b>	Horizontal Conveying And Inclined Conveying Of Small Components / Bulky Goods

### Belt Construction:

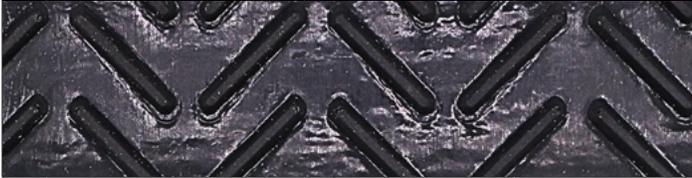

<b>Top Side (Material):</b>	PVC	
<b>Top Side (Surface):</b>	Chevron Top, Standard	
<b>Top Side (Thickness):</b>	0.2 in	5.08 mm
<b>Top Side (Color):</b>	Black	
<b>Top Side Shore:</b>	65A Shore	

<b>Bottom Side (Material):</b>	Polyester Fabric, Brushed	
<b>Bottom Side (Surface):</b>	Interwoven Fabric	
<b>Bottom Side (Thickness):</b>	- in	- mm
<b>Bottom Side (Color):</b>	Black	
<b>Bottom Side Shore:</b>	-	

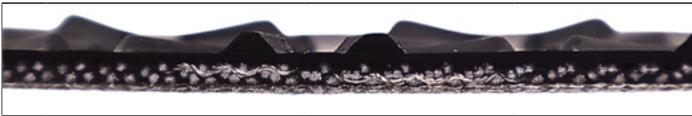

<b>Number of plies:</b>	1
<b>Weft:</b>	Flexible

### Technical Belt Data:

<b>Foodgrade (FG):</b>	No	
<b>Flame Retardant (FR):</b>	No	
<b>Belt Weight:</b>	0.85 +/- .085 lbs/ft <sup>2</sup>	4.15 +/- .42 kg/m <sup>2</sup>
<b>Belt Thickness:</b>	0.24 +/- 0.01 in	6.1 +/- .25 mm
<b>Tension Layer:</b>	-	
<b>Pulley Diameter (minimum):</b>	3 in	76.2 mm

<b>Tensile Rating:</b>	- lbs/in	
<b>Working Temperature Range:</b>	0 to 180 °F	-18 to 82 °C
<b>Hardness Topside:</b>	65A Shore	
<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	48.54 lbs/in	8.5 N/mm
<b>Back Flexing:</b>	- in	- mm
<b>Anti-Static:</b>	No	

### Joining Method:

Finger Splice

### Additional Information:

