


## MIR PART NUMBER: 1976604

### General Information:

<b>Product Description:</b>	M 30 BLUE MD SUPER DRIVE
<b>Features:</b>	Metal Detectable, Hygienic, Easy Washdown, Foodgrade, Self Tracking
<b>Market Segment:</b>	Food Bakery
<b>Applications:</b>	-

### Belt Construction:

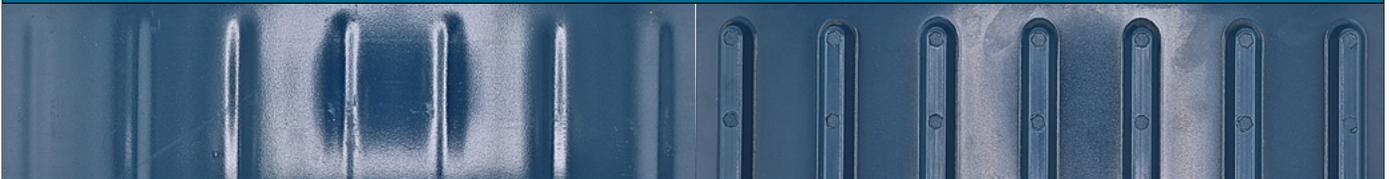

<b>Top Side (Material):</b>	Proprietary TPE/TPU	
<b>Top Side (Surface):</b>	Smooth	
<b>Top Side (Thickness):</b>	- in	- mm
<b>Top Side (Color):</b>	Dark Blue	
<b>Top Side Shore:</b>	53D Shore	

<b>Bottom Side (Material):</b>	Proprietary TPE/TPU	
<b>Bottom Side (Surface):</b>	Smooth	
<b>Bottom Side (Thickness):</b>	- in	- mm
<b>Bottom Side (Color):</b>	Dark Blue	
<b>Bottom Side Shore:</b>	-	



<b>Number of plies:</b>	0
<b>Weft:</b>	-

### Technical Belt Data:

<b>Foodgrade (FG):</b>	Yes	
<b>Flame Retardant (FR):</b>	No	
<b>Belt Weight:</b>	.77 (+.13 for each row of teeth) lbs/ft <sup>2</sup>	3.75 (+.19 for each row of teeth) kg/m <sup>2</sup>
<b>Belt Thickness:</b>	0.12 in	3 mm
<b>Tension Layer:</b>	-	
<b>Pulley Diameter (minimum):</b>	3.94 in	100 mm

<b>Tensile Rating:</b>	- lbs/in	
<b>Working Temperature Range:</b>	-5 to 140 °F	-20 to 60 °C
<b>Hardness Topside:</b>	53D Shore	
<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	33.6 (working load) lbs/in	5.88 (working load) N/mm
<b>Back Flexing:</b>	4.33 in	110 mm
<b>Anti-Static:</b>	No	

### Joining Method:

Butt Splice, Mechanical Fastener

### Additional Information:

