




## MIR PART NUMBER: 1998248

### General Information:

<b>Product Description:</b>	E 50/1 U0/U0 WHITE FBS CONV BELT
<b>Features:</b>	Foodgrade, Antistatic
<b>Market Segment:</b>	Food
<b>Applications:</b>	Conveying On Skid Bed, Conveying On Rollers, Conveying On Skid Bed On Top And Return, Accumulation

### Belt Construction:

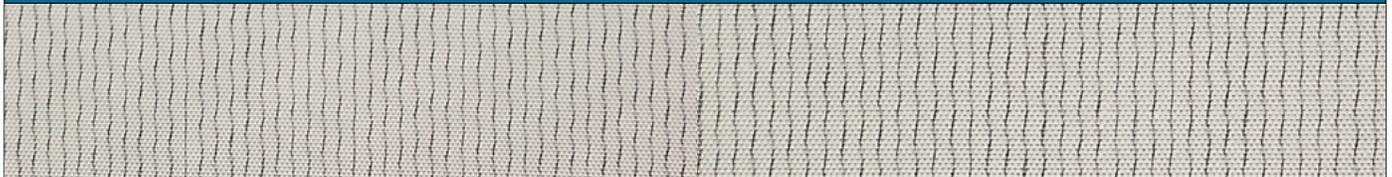

<b>Top Side (Material):</b>	Fabric		<b>Bottom Side (Material):</b>	Fabric	
<b>Top Side (Surface):</b>	PU Impregnated		<b>Bottom Side (Surface):</b>	PU Impregnated	
<b>Top Side (Thickness):</b>	- in	- mm	<b>Bottom Side (Thickness):</b>	0 in	0 mm
<b>Top Side (Color):</b>	White		<b>Bottom Side (Color):</b>	White	
<b>Top Side Shore:</b>	-		<b>Bottom Side Shore:</b>	-	



<b>Number of plies:</b>	1
<b>Weft:</b>	Rigid

### Technical Belt Data:

<b>Foodgrade (FG):</b>	Yes		<b>Tensile Rating:</b>	- lbs/in	
<b>Flame Retardant (FR):</b>	No		<b>Working Temperature Range:</b>	-4 to 212 °F	-20 to 100 °C
<b>Belt Weight:</b>	0.12 lbs/ft <sup>2</sup>	0.6 kg/m <sup>2</sup>	<b>Hardness Topside:</b>	-	
<b>Belt Thickness:</b>	0.02 in	0.6 mm	<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	29 lbs/in	5 N/mm
<b>Tension Layer:</b>	-		<b>Back Flexing:</b>	0.63 in	16 mm
<b>Pulley Diameter (minimum):</b>	0.24 in	6 mm	<b>Anti-Static:</b>	Yes	

### Joining Method:

Finger Splice

### Additional Information:

Diagonal single Z, Micro Z

