




## MIR PART NUMBER: 1999391

### General Information:

<b>Product Description:</b>	<b>E 80/2 U0/P5 WHITE GLOSS COS CONV BELT</b>
<b>Features:</b>	Foodgrade, Oil & Grease Resistant
<b>Market Segment:</b>	Food Bakery
<b>Applications:</b>	Flat, Rollers, Slider Bed

### Belt Construction:

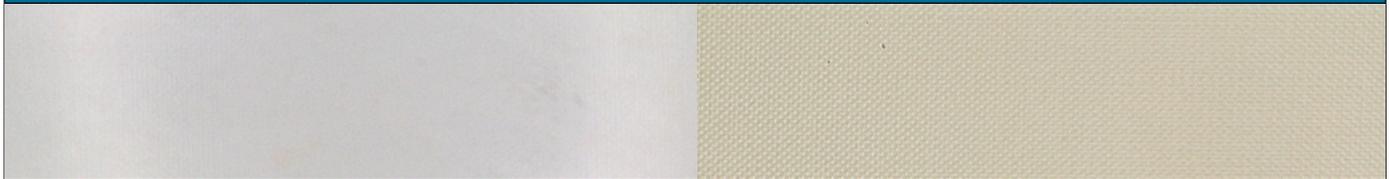

<b>Top Side (Material):</b>	Excon, PVC	
<b>Top Side (Surface):</b>	Smooth, Glossy	
<b>Top Side (Thickness):</b>	0.02 in	0.5 mm
<b>Top Side (Color):</b>	White	
<b>Top Side Shore:</b>	72A Shore	

<b>Bottom Side (Material):</b>	Ropanol, PUR	
<b>Bottom Side (Surface):</b>	PU Impregnated	
<b>Bottom Side (Thickness):</b>	0 in	0 mm
<b>Bottom Side (Color):</b>	Natural	
<b>Bottom Side Shore:</b>	-	



<b>Number of plies:</b>	2
<b>Weft:</b>	Rigid

### Technical Belt Data:

<b>Foodgrade (FG):</b>	Yes	
<b>Flame Retardant (FR):</b>	No	
<b>Belt Weight:</b>	0.49 lbs/ft <sup>2</sup>	2.4 kg/m <sup>2</sup>
<b>Belt Thickness:</b>	0.08 in	2 mm
<b>Tension Layer:</b>	Polyester	
<b>Pulley Diameter (minimum):</b>	1.18 in	30 mm

<b>Tensile Rating:</b>	- lbs/in	
<b>Working Temperature Range:</b>	14 to 158 °F	-10 to 70 °C
<b>Hardness Topside:</b>	72A Shore	
<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	45.68 lbs/in	8 N/mm
<b>Back Flexing:</b>	1.97 in	50 mm
<b>Anti-Static:</b>	No	

### Joining Method:

Finger Over Finger, Finger Splice

### Additional Information:

