




## MIR PART NUMBER: 1999399

### General Information:


<b>Product Description:</b>	E 60/2 U0/S2 BLUE AS COS CONV
<b>Features:</b>	Antistatic, Foodgrade, Nonstick
<b>Market Segment:</b>	Food Dairy, Food Confectionary & Candy
<b>Applications:</b>	Slider Bed, Rollers, Flat

### Belt Construction:

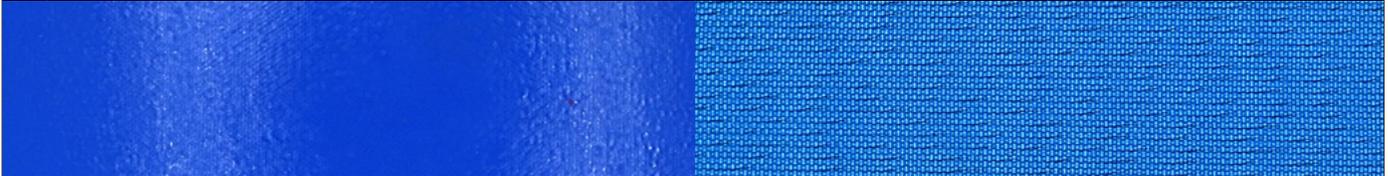

<b>Top Side (Material):</b>	Silam, Silicone	
<b>Top Side (Surface):</b>	Smooth, Glossy	
<b>Top Side (Thickness):</b>	0.01 in	0.2 mm
<b>Top Side (Color):</b>	Light Blue	
<b>Top Side Shore:</b>	30A Shore	

<b>Bottom Side (Material):</b>	Ropanol, PUR	
<b>Bottom Side (Surface):</b>	Impregnated Fabric	
<b>Bottom Side (Thickness):</b>	- in	- mm
<b>Bottom Side (Color):</b>	Transparent	
<b>Bottom Side Shore:</b>	-	



<b>Number of plies:</b>	2
<b>Weft:</b>	Rigid

### Technical Belt Data:

<b>Foodgrade (FG):</b>	Yes	
<b>Flame Retardant (FR):</b>	No	
<b>Belt Weight:</b>	0.31 lbs/ft <sup>2</sup>	1.5 kg/m <sup>2</sup>
<b>Belt Thickness:</b>	0.06 in	1.45 mm
<b>Tension Layer:</b>	Polyester	
<b>Pulley Diameter (minimum):</b>	0.24 in	6 mm

<b>Tensile Rating:</b>	- lbs/in	
<b>Working Temperature Range:</b>	5 to 194 °F	-15 to 90 °C
<b>Hardness Topside:</b>	30A Shore	
<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	34.26 lbs/in	6 N/mm
<b>Back Flexing:</b>	1.57 in	40 mm
<b>Anti-Static:</b>	Yes	

### Joining Method:

### Additional Information:

Finger Splice

