




MIR PART NUMBER: 2001872

General Information:

| | |
|-----------------------------|---|
| Product Description: | E 40/2 U0/A2 WHITE MATTE COS CONV BELT |
| Features: | Nonfray Construction, Great Release, Hydrolysis Resistant, Abrasion Resistant |
| Market Segment: | - |
| Applications: | Nose Bars, Power Turn |

Belt Construction:

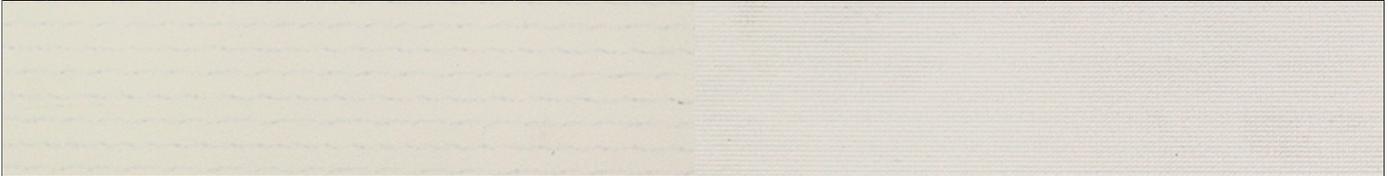

| | | |
|------------------------------|------------|--------|
| Top Side (Material): | Polyolefin | |
| Top Side (Surface): | Matte | |
| Top Side (Thickness): | 0.01 in | 0.2 mm |
| Top Side (Color): | White | |
| Top Side Shore: | 92A Shore | |

| | | |
|---------------------------------|--------------------|------|
| Bottom Side (Material): | Polyester | |
| Bottom Side (Surface): | Impregnated Fabric | |
| Bottom Side (Thickness): | - in | - mm |
| Bottom Side (Color): | White | |
| Bottom Side Shore: | - | |



| | |
|-------------------------|----------|
| Number of plies: | 2 |
| Weft: | Flexible |

Technical Belt Data:

| | | |
|-----------------------------------|-------------------------|---------------------|
| Foodgrade (FG): | Yes | |
| Flame Retardant (FR): | No | |
| Belt Weight: | 0.2 lbs/ft ² | 1 kg/m ² |
| Belt Thickness: | 0.04 in | 1.1 mm |
| Tension Layer: | Polyester | |
| Pulley Diameter (minimum): | 0.24 in | 6 mm |

| | | |
|---|---------------|--------------|
| Tensile Rating: | - lbs/in | |
| Working Temperature Range: | -40 to 140 °F | -40 to 60 °C |
| Hardness Topside: | 92A Shore | |
| Force at 1% Elongation (static) / k1% Relaxed: | 22.84 lbs/in | 4 N/mm |
| Back Flexing: | 0.79 in | 20 mm |
| Anti-Static: | Yes | |

Joining Method:

Endless Single Finger

Additional Information:

Clipper Lace UCM36 XSP

