




## MIR PART NUMBER: 2051878

### General Information:

<b>Product Description:</b>	SW125 00+01 black
<b>Features:</b>	Impact Resistant, Low Friction Back Side
<b>Market Segment:</b>	Logistics
<b>Applications:</b>	Slider Bed, Rollers, Flat

### Belt Construction:

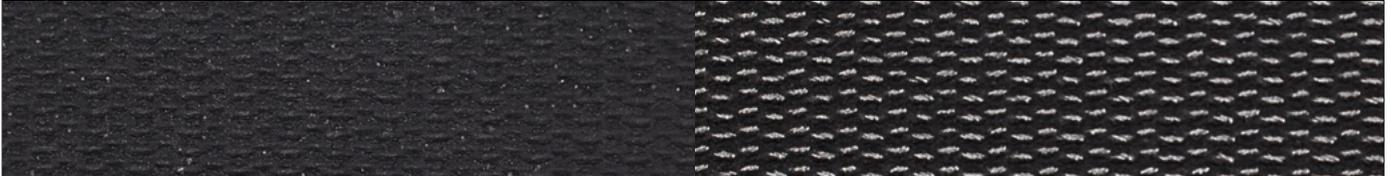

<b>Top Side (Material):</b>	PVC (Flexam)	
<b>Top Side (Surface):</b>	Impregnated Fabric	
<b>Top Side (Thickness):</b>	- in	- mm
<b>Top Side (Color):</b>	Black	
<b>Top Side Shore:</b>	-	

<b>Bottom Side (Material):</b>	PVC (Flexam)	
<b>Bottom Side (Surface):</b>	Brushed	
<b>Bottom Side (Thickness):</b>	- in	- mm
<b>Bottom Side (Color):</b>	Black	
<b>Bottom Side Shore:</b>	-	



<b>Number of plies:</b>	1
<b>Weft:</b>	Flexible

### Technical Belt Data:

<b>Foodgrade (FG):</b>	No	
<b>Flame Retardant (FR):</b>	Yes	
<b>Belt Weight:</b>	1.19 lbs/ft <sup>2</sup>	5.8 kg/m <sup>2</sup>
<b>Belt Thickness:</b>	0.15 in	3.8 mm
<b>Tension Layer:</b>	Polyester Spun	
<b>Pulley Diameter (minimum):</b>	5.91 in	150 mm

<b>Tensile Rating:</b>	1598.84 lbs/in	
<b>Working Temperature Range:</b>	5 to 176 °F	-15 to 80 °C
<b>Hardness Topside:</b>	-	
<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	199.86 (at 2% elongation) lbs/in	35 (at 2% elongation) N/mm
<b>Back Flexing:</b>	5.91 in	150 mm
<b>Anti-Static:</b>	No	

### Joining Method:

Mechanical Fasteners

### Additional Information:

Splice Finger 110X10

