




## MIR PART NUMBER: 2064468

### General Information:

<b>Product Description:</b>	E0 4/2 U0/U0 BLUE CONV BELT CONV BELT
<b>Features:</b>	Nonfray, High Release, Hydrolysis Resistance, Abrasion Resistance
<b>Market Segment:</b>	-
<b>Applications:</b>	Nose Bars, Power Turn Suitable

### Belt Construction:

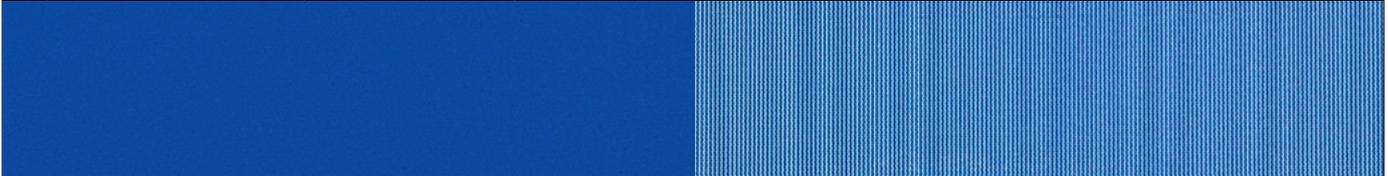

<b>Top Side (Material):</b>	Polyolefin	
<b>Top Side (Surface):</b>	Matte	
<b>Top Side (Thickness):</b>	0.01 in	0.2 mm
<b>Top Side (Color):</b>	Blue	
<b>Top Side Shore:</b>	92A Shore	

<b>Bottom Side (Material):</b>	Non-fray polyester fabric	
<b>Bottom Side (Surface):</b>	PU Impregnated	
<b>Bottom Side (Thickness):</b>	- in	- mm
<b>Bottom Side (Color):</b>	Blue	
<b>Bottom Side Shore:</b>	-	



<b>Number of plies:</b>	2
<b>Weft:</b>	Flexible

### Technical Belt Data:

<b>Foodgrade (FG):</b>	Yes	
<b>Flame Retardant (FR):</b>	No	
<b>Belt Weight:</b>	0.2 lbs/ft <sup>2</sup>	1 kg/m <sup>2</sup>
<b>Belt Thickness:</b>	0.04 in	1.1 mm
<b>Tension Layer:</b>	Nonfray Polyester	
<b>Pulley Diameter (minimum):</b>	0.24 in	6 mm

<b>Tensile Rating:</b>	- lbs/in	
<b>Working Temperature Range:</b>	-40 to 140 °F	-40 to 60 °C
<b>Hardness Topside:</b>	92A Shore	
<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	22.84 lbs/in	4 N/mm
<b>Back Flexing:</b>	0.79 in	20 mm
<b>Anti-Static:</b>	Yes	

### Joining Method:

Endless Single Finger

### Additional Information:

Clipper Lace UCM36 XSP

