


## MIR PART NUMBER: 2088595


### General Information:

<b>Product Description:</b>	E 5/1 E5/E6 WHITE CONV BELT
<b>Features:</b>	Oil & Fat Resistant, Anti-Hydrolysis, Anti-Microbial, Abrasion Resistant
<b>Market Segment:</b>	-
<b>Applications:</b>	-

### Belt Construction:

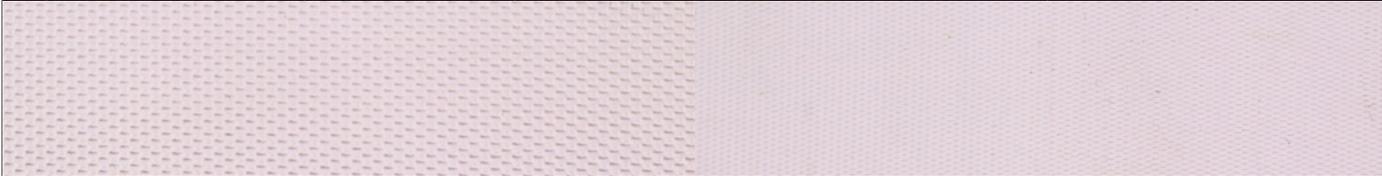

<b>Top Side (Material):</b>	PU		<b>Bottom Side (Material):</b>	PU	
<b>Top Side (Surface):</b>	Pattern A		<b>Bottom Side (Surface):</b>	Pattern Y	
<b>Top Side (Thickness):</b>	0.02 in	0.6 mm	<b>Bottom Side (Thickness):</b>	0.02 in	0.45 mm
<b>Top Side (Color):</b>	White		<b>Bottom Side (Color):</b>	White	
<b>Top Side Shore:</b>	85A Shore		<b>Bottom Side Shore:</b>	85A Shore	

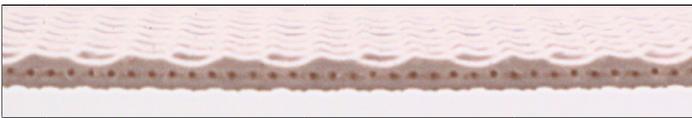

<b>Number of plies:</b>	1
<b>Weft:</b>	Rigid

### Technical Belt Data:

<b>Foodgrade (FG):</b>	Yes		<b>Tensile Rating:</b>	- lbs/in	
<b>Flame Retardant (FR):</b>	No		<b>Working Temperature Range:</b>	-13 to 194 °F	-25 to 90 °C
<b>Belt Weight:</b>	0.26 lbs/ft <sup>2</sup>	1.25 kg/m <sup>2</sup>	<b>Hardness Topside:</b>	85A Shore	
<b>Belt Thickness:</b>	0.06 in	1.55 mm	<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	28.6 lbs/in	5 N/mm
<b>Tension Layer:</b>	-		<b>Back Flexing:</b>	0.39 in	10 mm
<b>Pulley Diameter (minimum):</b>	0.39 in	10 mm	<b>Anti-Static:</b>	No	

### Joining Method:

Single Finger Endless

### Additional Information:

