




MIR PART NUMBER: 2145

General Information:


Product Description:	M 150/I P0/P0 BLACK FBS CONV BELT
Features:	Impact Resistant, Low Friction Back Side
Market Segment:	Logistics Distribution & Warehousing
Applications:	Slider Bed, Rollers, Flat

Belt Construction:

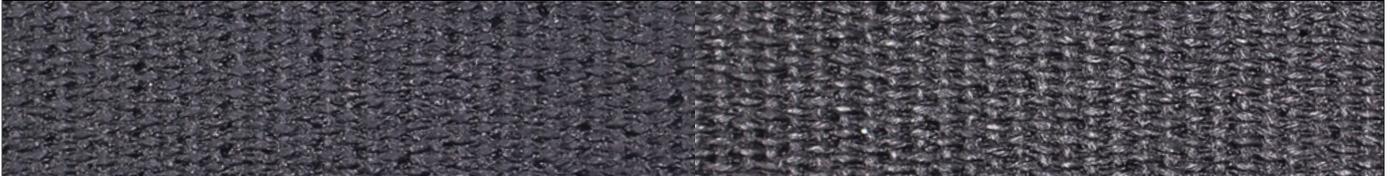

Top Side (Material):	Flexam, PVC	
Top Side (Surface):	Impregnated Fabric	
Top Side (Thickness):	- in	- mm
Top Side (Color):	Black	
Top Side Shore:	-	

Bottom Side (Material):	Flexam, PVC	
Bottom Side (Surface):	Brushed	
Bottom Side (Thickness):	- in	- mm
Bottom Side (Color):	Black	
Bottom Side Shore:	-	



Number of plies:	1
Weft:	Flexible

Technical Belt Data:

Foodgrade (FG):	No	
Flame Retardant (FR):	Yes	
Belt Weight:	0.88 lbs/ft ²	4.3 kg/m ²
Belt Thickness:	0.18 in	4.6 mm
Tension Layer:	Polyester	
Pulley Diameter (minimum):	3.54 in	90 mm

Tensile Rating:	- lbs/in	
Working Temperature Range:	5 to 180 °F	-15 to 82 °C
Hardness Topside:	-	
Force at 1% Elongation (static) / k1% Relaxed:	57.1 lbs/in	10 N/mm
Back Flexing:	3.54 in	90 mm
Anti-Static:	No	

Joining Method:

Mechanical Fasteners

Additional Information:

Splice Finger 110X10

