




MIR PART NUMBER: 2341

General Information:

Product Description:	M 30 TAN CONV BELT
Features:	Cut Resistant, Abrasion Resistant, Hygienic
Market Segment:	-
Applications:	-

Belt Construction:

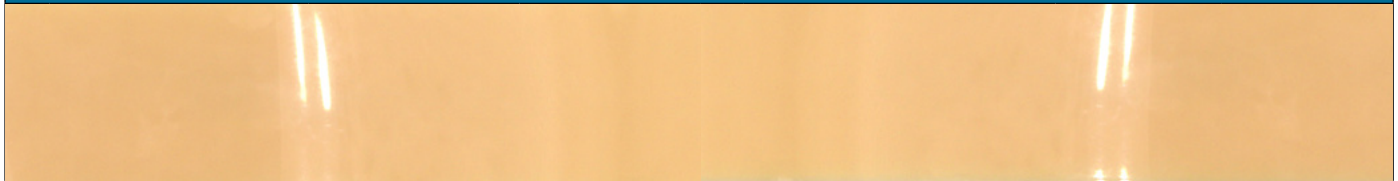

Top Side (Material):	Proprietary TPE/TPU	
Top Side (Surface):	Smooth	
Top Side (Thickness):	- in	- mm
Top Side (Color):	Beige	
Top Side Shore:	95A Shore/46D Shore	

Bottom Side (Material):	Proprietary TPE/TPU	
Bottom Side (Surface):	Smooth	
Bottom Side (Thickness):	- in	- mm
Bottom Side (Color):	Beige	
Bottom Side Shore:	95A Shore/46D Shore	



Number of plies:	0
Weft:	-

Technical Belt Data:

Foodgrade (FG):	Yes	
Flame Retardant (FR):	No	
Belt Weight:	- lbs/ft ²	- kg/m ²
Belt Thickness:	0.12 in	3 mm
Tension Layer:	-	
Pulley Diameter (minimum):	1.58 in	40 mm

Tensile Rating:	- lbs/in	
Working Temperature Range:	-20 to 158 °F	-30 to 70 °C
Hardness Topside:	95A Shore/46D Shore	
Force at 1% Elongation (static) / k1% Relaxed:	10.1 lbs/in	1.77 N/mm
Back Flexing:	1.58 in	40 mm
Anti-Static:	No	

Joining Method:

Butt Splice

Additional Information:

Belting Solved

24/7

On-Site Service 877 MIR-BELT



mir-belting.com
mir@mir-belting.com