


MIR PART NUMBER: 3188

General Information:

Product Description:	1M6 U3/U3 FL CONV BELT
Features:	Antistatic
Market Segment:	Paper & Print, Materials Handling
Applications:	Cutters, Stacking, Gathering, Wrapping, Binding

Belt Construction:

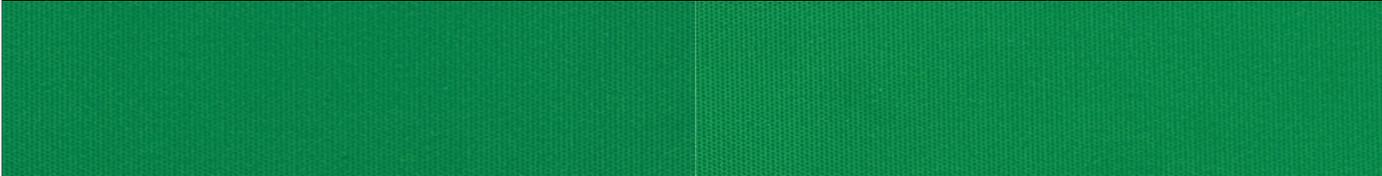

Top Side (Material):	TPU		Bottom Side (Material):	TPU	
Top Side (Surface):	Pattern FL, Coarse, Rough		Bottom Side (Surface):	Pattern FL	
Top Side (Thickness):	0.01 in	0.3 mm	Bottom Side (Thickness):	0.01 in	0.3 mm
Top Side (Color):	Green		Bottom Side (Color):	Green	
Top Side Shore:	-		Bottom Side Shore:	-	



Number of plies:	1
Weft:	Rigid

Technical Belt Data:

Foodgrade (FG):	Yes		Tensile Rating:	- lbs/in	
Flame Retardant (FR):	No		Working Temperature Range:	-4 to 212 °F	-20 to 100 °C
Belt Weight:	0.27 lbs/ft ²	1.3 kg/m ²	Hardness Topside:	-	
Belt Thickness:	0.05 in	1.2 mm	Force at 1% Elongation (static) / k1% Relaxed:	34.26 lbs/in	6 N/mm
Tension Layer:	Polyester (PET)		Back Flexing:	0.6 in	15 mm
Pulley Diameter (minimum):	0.4 in	10 mm	Anti-Static:	Yes	

Joining Method:

Finger, Overlap, Micro Z

Additional Information:

OVERLAP

