



MIR PART NUMBER: 3920

General Information:

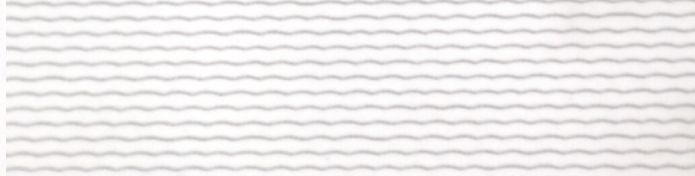

Product Description: E 6/2 U0/U3 WHITE COS AS FG

Features: Antistatic, Hydrolysis Resistant, Knife Edge Transfer, Oil & Grease Resistant

Market Segment: Food Confectionary & Candy, Food Bakery

Applications: Flat, Rollers, Slider Bed

Belt Construction:

								
Top Side (Material):		Ultranyl, TPU		Bottom Side (Material):		Ropanol, PUR		
Top Side (Surface):		Smooth, Fine Matte Finish		Bottom Side (Surface):		Impregnated Fabric		
Top Side (Thickness):		0.01 in	0.3 mm	Bottom Side (Thickness):		- in	- mm	
Top Side (Color):		White		Bottom Side (Color):		Natural		
Top Side Shore:		86A Shore		Bottom Side Shore:		-		
				Number of plies:				2
				Weft:				Rigid

Technical Belt Data:

Foodgrade (FG):	Yes			Tensile Rating:	- lbs/in	
Flame Retardant (FR):	No			Working Temperature Range:	-22 to 194 °F	-30 to 90 °C
Belt Weight:	0.29 lbs/ft ²	1.4 kg/m ²		Hardness Topside:	86A Shore	
Belt Thickness:	0.05 in	1.3 mm		Force at 1% Elongation (static) / k1% Relaxed:	34.26 lbs/in	6 N/mm
Tension Layer:	Polyester			Back Flexing:	0.31 in	8 mm
Pulley Diameter (minimum):	0.24 in	6 mm		Anti-Static:	Yes	

Joining Method:

Hot splicing is always preferable

Additional Information:

Glueing can only be done when the belt is exposed to normal temperature and the humidity is not excessive.

