




MIR PART NUMBER: 49828

General Information:


Product Description:	E 49/2 U0/U3 WHITE COS AS ANTI WICKING BELT
Features:	Antistatic, Anti-bacterial, Low Friction, Grease Resistant, Anti-wicking
Market Segment:	-
Applications:	-

Belt Construction:

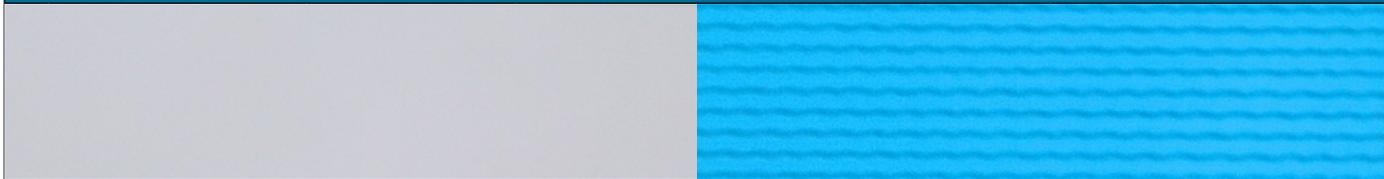

Top Side (Material):	PU	
Top Side (Surface):	Matte	
Top Side (Thickness):	0.01 in	0.25 mm
Top Side (Color):	White	
Top Side Shore:	85A Shore	

Bottom Side (Material):	PU	
Bottom Side (Surface):	Impregnated Fabric	
Bottom Side (Thickness):	0 in	0 mm
Bottom Side (Color):	Blue	
Bottom Side Shore:	0A Shore	



Number of plies:	2
Weft:	Rigid

Technical Belt Data:

Foodgrade (FG):	Yes	
Flame Retardant (FR):	No	
Belt Weight:	0.28 lbs/ft ²	1.37 kg/m ²
Belt Thickness:	0.05 in	1.27 mm
Tension Layer:	Polyester	
Pulley Diameter (minimum):	0.39 in	10 mm

Tensile Rating:	- lbs/in	
Working Temperature Range:	-4 to 194 °F	-20 to 90 °C
Hardness Topside:	85A Shore	
Force at 1% Elongation (static) / k1% Relaxed:	39.97 lbs/in	7 N/mm
Back Flexing:	1.18 in	30 mm
Anti-Static:	Yes	

Joining Method:

DS/2 (Recommended)

Additional Information:

DS

