


## MIR PART NUMBER: 84035

### General Information:


<b>Product Description:</b>	E 60/2 U0/U2 BLUE COS NEG PYR CONV BELT
<b>Features:</b>	Antistatic, Foodgrade
<b>Market Segment:</b>	Food
<b>Applications:</b>	Conveying On Rollers, Conveying On Skid Bed, Inclined Conveying

### Belt Construction:

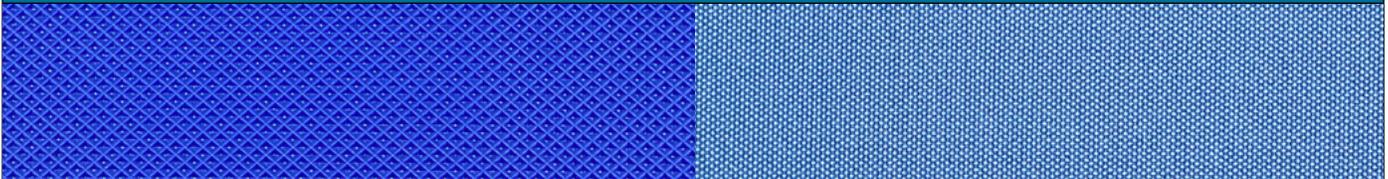

<b>Top Side (Material):</b>	Polyurethane (TPU)	
<b>Top Side (Surface):</b>	Negative Pyramid	
<b>Top Side (Thickness):</b>	0.01 in	0.2 mm
<b>Top Side (Color):</b>	Blue	
<b>Top Side Shore:</b>	-	

<b>Bottom Side (Material):</b>	PU Impregnated	
<b>Bottom Side (Surface):</b>	Fabric	
<b>Bottom Side (Thickness):</b>	- in	- mm
<b>Bottom Side (Color):</b>	Blue	
<b>Bottom Side Shore:</b>	-	

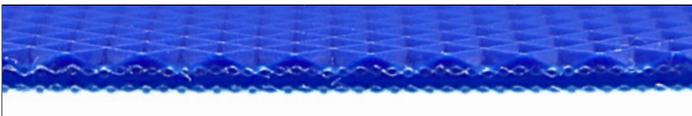

<b>Number of plies:</b>	2
<b>Weft:</b>	Rigid

### Technical Belt Data:

<b>Foodgrade (FG):</b>	Yes	
<b>Flame Retardant (FR):</b>	No	
<b>Belt Weight:</b>	0.31 lbs/ft <sup>2</sup>	1.5 kg/m <sup>2</sup>
<b>Belt Thickness:</b>	0.06 in	1.6 mm
<b>Tension Layer:</b>	Polyester	
<b>Pulley Diameter (minimum):</b>	0.31 in	8 mm

<b>Tensile Rating:</b>	- lbs/in	
<b>Working Temperature Range:</b>	-22 to 230 °F	-30 to 110 °C
<b>Hardness Topside:</b>	-	
<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	34.2 lbs/in	6 N/mm
<b>Back Flexing:</b>	0.63 in	16 mm
<b>Anti-Static:</b>	Yes	

### Joining Method:

Finger Splice, Single Z - 80 x 10 mm

### Additional Information:

Diagonal Single Z, Double Z, Skived Joint '1', Micro Z - 20 x 6 mm

