




## MIR PART NUMBER: 84898

### General Information:

<b>Product Description:</b>	E 70/2 UO/U5 CLEAR AS MATTE FINISH CONV BELT
<b>Features:</b>	Abrasion Resistant, Cut Resistant, Foodgrade, Antistatic
<b>Market Segment:</b>	Make Up Tables, Metal Part Conveying
<b>Applications:</b>	-

### Belt Construction:

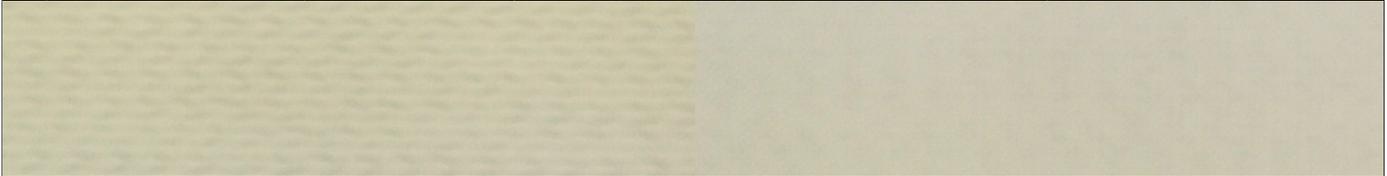

<b>Top Side (Material):</b>	PU	
<b>Top Side (Surface):</b>	Matte	
<b>Top Side (Thickness):</b>	0.02 in	0.5 mm
<b>Top Side (Color):</b>	Transparent	
<b>Top Side Shore:</b>	92A Shore	

<b>Bottom Side (Material):</b>	Polyester	
<b>Bottom Side (Surface):</b>	PU Impregnated	
<b>Bottom Side (Thickness):</b>	- in	- mm
<b>Bottom Side (Color):</b>	Transparent	
<b>Bottom Side Shore:</b>	-	



<b>Number of plies:</b>	2
<b>Weft:</b>	Rigid

### Technical Belt Data:

<b>Foodgrade (FG):</b>	Yes	
<b>Flame Retardant (FR):</b>	No	
<b>Belt Weight:</b>	0.41 lbs/ft <sup>2</sup>	2 kg/m <sup>2</sup>
<b>Belt Thickness:</b>	0.07 in	1.85 mm
<b>Tension Layer:</b>	Polyester	
<b>Pulley Diameter (minimum):</b>	1.18 in	30 mm

<b>Tensile Rating:</b>	- lbs/in	
<b>Working Temperature Range:</b>	-4 to 212 °F	-20 to 100 °C
<b>Hardness Topside:</b>	92A Shore	
<b>Force at 1% Elongation (static) / k1% Relaxed:</b>	34.26 lbs/in	6 N/mm
<b>Back Flexing:</b>	2.36 in	60 mm
<b>Anti-Static:</b>	Yes	

### Joining Method:

Single Finger

### Additional Information:

