


MIR PART NUMBER: 8916

General Information:

Product Description:	M 70/2 N0/N3 WHITE PEBBLE TOP CONV BELT
Features:	USDA/Mid Approved For Packaged Products Only, Non-Marking, Meets FDA Requirements, Oil Resistant, Able To Handle Inclines Up To 20 degrees, Excellent Flexibility Over Small Pulleys
Market Segment:	Food Bakery, Food Fruit & Vegetable, Packaged Meat, Food Poultry & Fish
Applications:	-

Belt Construction:

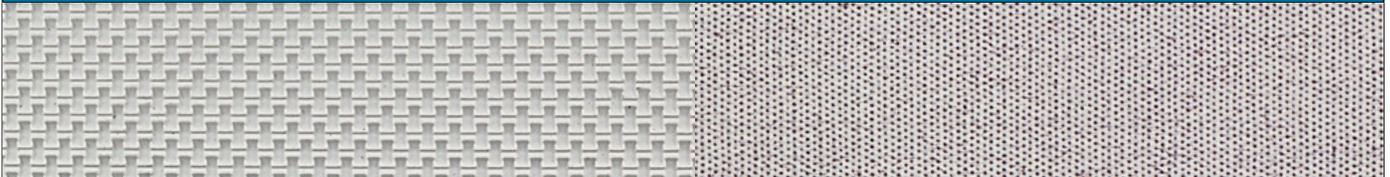

Top Side (Material):	NBR	
Top Side (Surface):	Neatgrip	
Top Side (Thickness):	0.05 in	1.2 mm
Top Side (Color):	White	
Top Side Shore:	-	

Bottom Side (Material):	-	
Bottom Side (Surface):	Friction	
Bottom Side (Thickness):	- in	- mm
Bottom Side (Color):	White	
Bottom Side Shore:	-	



Number of plies:	2
Weft:	-

Technical Belt Data:

Foodgrade (FG):	Yes	
Flame Retardant (FR):	No	
Belt Weight:	0.61 lbs/ft ²	2.98 kg/m ²
Belt Thickness:	0.11 +/- .01 in	2.77 +/- .25 mm
Tension Layer:	-	
Pulley Diameter (minimum):	1.5 in	38.1 mm

Tensile Rating:	- lbs/in	
Working Temperature Range:	0 to 250 °F	-18 to 121 °C
Hardness Topside:	-	
Force at 1% Elongation (static) / k1% Relaxed:	70 (at 2% elongation) lbs/in	12.5 (at 2% elongation) N/mm
Back Flexing:	- in	- mm
Anti-Static:	No	

Joining Method:

Stepped Angle

Additional Information:

