



MIR PART NUMBER: 1917789

General Information:


Product Description: E 60/2 U0/U0 LIGHT BLUE

Features: Antistatic, Anti-Microbial, Foodgrade, Non-Fraying

Market Segment: Food: Confectionary & Candy, Food: Bakery, Container & Packaging

Applications: Silder Bed, Rollers, Flat

Belt Construction:

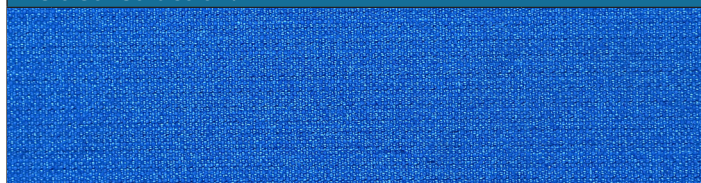


Top Side (Material): Ropanol, PUR

Top Side (Surface): Impregnated Fabric

Top Side (Thickness): 0 in 0 mm

Top Side (Color): Light Blue

Top Side Shore: -

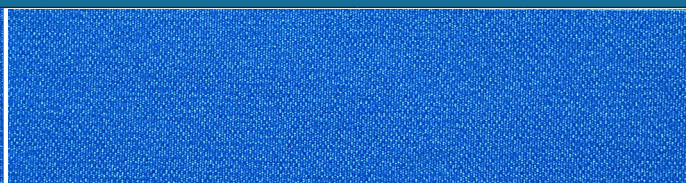


Bottom Side (Material): -

Bottom Side (Surface): Impregnated Fabric

Bottom Side (Thickness): - in - mm

Bottom Side (Color): -

Bottom Side Shore: -



Number of plies: 2

Weft: Rigid

Technical Belt Data:

Foodgrade (FG): Yes

Flame Retardant (FR): No

Belt Weight: 0.27 lbs/ft² 1.3 kg/m²

Belt Thickness: 0.05 in 1.2 mm

Material Between Plies: -

Pulley Diameter (minimum): 0.24 in 6 mm

Tensile Rating: - lbs/in

Working Temperature Range: -4 to 194 °F -20 to 90 °C

Hardness Topside: -

Force at 1% Elongation (static) / k1% Relaxed: 34.2 lbs/in 6 N/mm

Back Flexing: 0.79 in 20 mm

Anti-Static: Yes

Joining Method:

Finger Over Finger

Additional Information:

Belting Solved

24/7

On-Site Service 877 MIR-BELT



mir-belting.com
mir@mir-belting.com