




MIR PART NUMBER: 12879

General Information:

Product Description:	M 80/3 E0/E0 WHITE BB RIBBED CONV BELT
Features:	Great For Dough Release
Market Segment:	-
Applications:	-

Belt Construction:

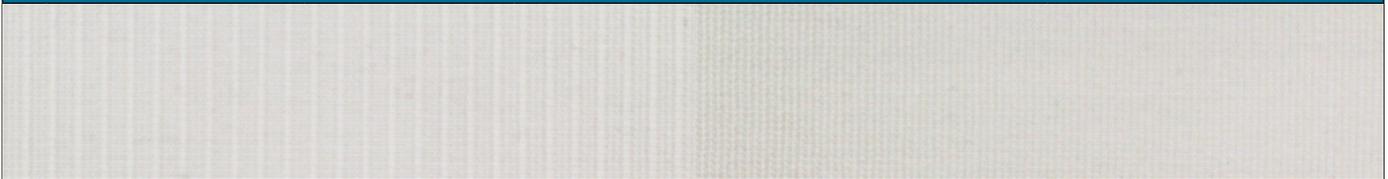

Top Side (Material):	Spun Polyester	
Top Side (Surface):	Bare Ribbed Fabric	
Top Side (Thickness):	- in	- mm
Top Side (Color):	White	
Top Side Shore:	0A Shore	

Bottom Side (Material):	Spun Polyester Fabric	
Bottom Side (Surface):	Bare	
Bottom Side (Thickness):	- in	- mm
Bottom Side (Color):	White	
Bottom Side Shore:	-	



Number of plies:	3
Weft:	Flexible

Technical Belt Data:

Foodgrade (FG):	Yes	
Flame Retardant (FR):	No	
Belt Weight:	0.53 lbs/ft ²	2.6 kg/m ²
Belt Thickness:	0.1 in	2.5 mm
Tension Layer:	Spun Polyester Fabric	
Pulley Diameter (minimum):	1.97 in	50 mm

Tensile Rating:	- lbs/in	
Working Temperature Range:	-22 to 176 °F	-30 to 80 °C
Hardness Topside:	0A Shore	
Force at 1% Elongation (static) / k1% Relaxed:	45.68 lbs/in	8 N/mm
Back Flexing:	1.97 in	50 mm
Anti-Static:	No	

Joining Method:

Endless Single Finger

Additional Information:

