




MIR PART NUMBER: 9404019


General Information:

Product Description:	S 15 GREEN CONV BELT
Features:	Antistatic, FDA
Market Segment:	Paper & Print, Packaging
Applications:	Conveying On Skid Bed, Conveying On Rollers, Troughed Conveying

Belt Construction:

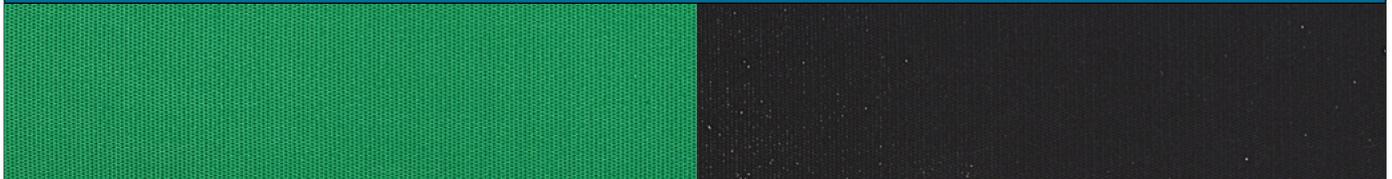

Top Side (Material):	TPU		Bottom Side (Material):	TPU	
Top Side (Surface):	Pattern FL, Coarse, Rough		Bottom Side (Surface):	Pattern FL, Coarse, Rough	
Top Side (Thickness):	0.02 in	0.5 mm	Bottom Side (Thickness):	0.04 in	1 mm
Top Side (Color):	Green		Bottom Side (Color):	Black	
Top Side Shore:	-		Bottom Side Shore:	-	



Number of plies:	0
Weft:	-

Technical Belt Data:

Foodgrade (FG):	Yes		Tensile Rating:	- lbs/in	
Flame Retardant (FR):	No		Working Temperature Range:	-4 to 140 °F	-20 to 60 °C
Belt Weight:	0.33 lbs/ft ²	1.6 kg/m ²	Hardness Topside:	-	
Belt Thickness:	0.06 in	1.5 mm	Force at 1% Elongation (static) / k1% Relaxed:	17 (at 8% elongation) lbs/in	3 (at 8% elongation) N/mm
Tension Layer:	-		Back Flexing:	0.59 in	15 mm
Pulley Diameter (minimum):	0.39 in	10 mm	Anti-Static:	Yes	

Joining Method:

Singe Finger Splice, Overlap, Butt Splice, Single Z

Additional Information:

Diagonal Single Z, Micro Z, Overlap, Butt Splice

