


MIR PART NUMBER: 9409

General Information:

Product Description:	E 45/2 0/U/T3 GRAY COS CONV BELT
Features:	Foodgrade, High Release
Market Segment:	Food Paper & Print
Applications:	Slider bed, Rollers, Flat

Belt Construction:

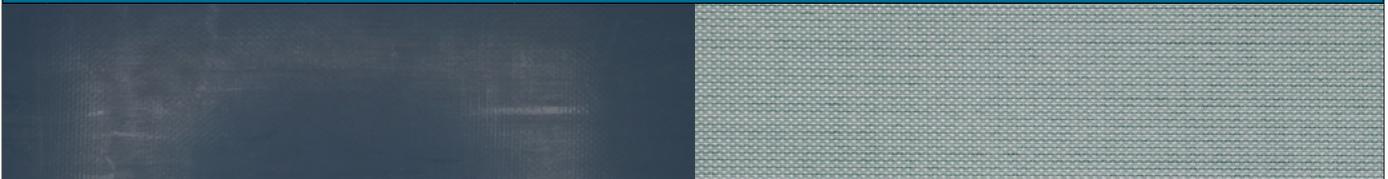

Top Side (Material):	Teflon, PTFE	
Top Side (Surface):	Smooth, Glossy	
Top Side (Thickness):	0.004 in	0.1 mm
Top Side (Color):	Gray/Anthracite	
Top Side Shore:	-	

Bottom Side (Material):	Polyester	
Bottom Side (Surface):	Fabric	
Bottom Side (Thickness):	- in	- mm
Bottom Side (Color):	Natural	
Bottom Side Shore:	-	



Number of plies:	2	
Weft:	Rigid	

Technical Belt Data:

Foodgrade (FG):	Yes	
Flame Retardant (FR):	No	
Belt Weight:	0.35 lbs/ft ²	1.7 kg/m ²
Belt Thickness:	0.06 in	1.6 mm
Tension Layer:	Polyester	
Pulley Diameter (minimum):	1.18 in	30 mm

Tensile Rating:	- lbs/in	
Working Temperature Range:	-4 to 194 °F	-20 to 90 °C
Hardness Topside:	-	
Force at 1% Elongation (static) / k1% Relaxed:	45.68 lbs/in	8 N/mm
Back Flexing:	1.97 in	50 mm
Anti-Static:	No	

Joining Method:

Hot splicing is always preferable. Glueing can only be done when the belt is exposed to normal temperature and the humidity is not excessive

Additional Information:

